


# Sycada m!Trace

## Guardian Solo Telematics Terminal

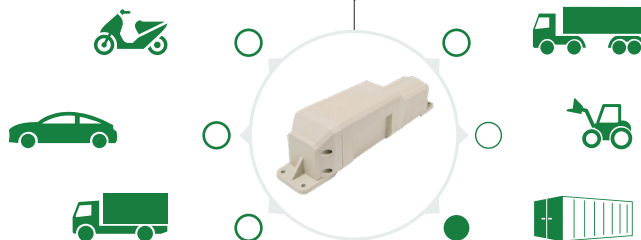

### GENERAL

Communication Modes	GPRS/EDGE/HSPA and CDMA 1xRTT packet data, UDP and SMS
Location Technology	50 Channel GPS
Operating Voltage	3.6 volt internal battery pack

### GPS

Location Technology	GPS
Enhancement Technology	SBAS: WASS, EGNOS, MSAS, GAGAN
Tracking Sensitivity	-162 dBm
Acquisition Sensitivity	-147 dBm
Location Accuracy	2.0m
AGPS / Location assistance capable	

### CELLULAR

Data Support	SMS, GPRS, CDMA 1XRTT or HSPA packet data
Operating Bands (MHz band)	
GSM/GPRS	850/900/1800/1900
CDMA/1xRTT	850/1800
HSPA/UMTS	800(VI)/850(V)/900(VIII)/1700(IV)/1900(II)/2100(I)
Transmitter Power	
GSM/1xRTT	850/900/1800/1900
CDMA/1xRTT	850/1800
HSPA/UMTS	all bands
HSPA data rates	5.6 Mbps upload / 7.2 Mbps download
HSPA Fallback	EDGE/GPRS/GSM quad band EDGE MCS1-MCS9 3GPP Release 6

### CERTIFICATIONS

Fully certified FCC, CE, IC, PTCRB, Applicable Carriers

### CERTIFICATIONS

Customized hardware and software development available on request

### ENVIRONMENTAL

Temperature	-30° to + 75° C (operating) tethered -40° to + 85° C (storage)
Humidity	95% R.H. @ 50° C non-condensing
Shock and Vibration	U.S. Military Standard 202G and 801G, SAE J1455
EMC/EMI	SAE J1113
RoHS Compliant	

### ELECTRICAL

Operating Voltage	3.6 internal battery
Power Consumption	<100µA @ 12V (deep sleep) 70mA @ 12V (active standby)

### PHYSICAL

Dimensions	2.25" x 2.25" x 10.5" (55 x 55 x 260mm)
Weight	32oz (907g)

### CONNECTORS, SIM ACCESS

SIM Access	Internal
------------	----------

### KEY FEATURES

- 7 years with single message cycle per day on fully charged batteries
- 57Ah lithium field replaceable battery pack
- IP67 sealed and rugged enclosure
- Packet data (GPRS, CDMA 1xRTT, or HSPA) and SMS-based messaging
- Internal cellular and GPS antennas
- Super Sensitive GPS (-162 dBm tracking)
- Built-in 3-axis accelerometer for motion sense
- Ultra low power sleep mode (<100µA)
- Voltage monitoring and low battery notification
- 2,000 buffered messages
- 10 built-in geo-fences

### MOUNTING

Screw mounting bracket  
Magnet Mount

#### SYCADA NEDERLAND B.V.

Burg. Stramanweg 105B 1101 AA  
Amsterdam - Gebouw Parijs  
The Netherlands  
Tel: +31 (0) 20 311 6500  
Fax: +31 (0) 20 311 6509  
info@sycada.com

#### SYCADA DEUTSCHLAND GMBH

Elsenheimerstr. 47  
D-80687 Munich - Germany  
Tel: +49 (0) 89 550 616 0  
Fax: +49 (0) 89 550 616 16  
www.sycada.com/de/

#### SYCADA HELLAS LTD

Tzaferi 16  
11854 Athens - Greece  
Tel: +30 210 97 51 322  
Fax: +30 210 97 51 332  
www.sycada.com